



QLM



QL100



QL

IDENTIFICATION

## GENERAL DESCRIPTION

Quick Link (QL & QLM) connectivity accessories provides an easy, fast, modular and cost-effective solution whenever 'plug-in connection' is preferable. QL Series is compatible with DS2100N, DS2400N, DS4800, Matrix 210™, Matrix 410™ and Matrix 450™. QL300/500 and QLM500/600/700 link 1D/2D code readers to the Power Supply, External Trigger, IDNET™ network, Digital I/O and Communication connections including interface to Serial, Ethernet, Ethernet/IP, Profibus and Profinet. QL100/150/200 provides an ID-NET™ 'T' connector. This is the most effective way to build the ID-NET™ network by passing through power and network's signals. Service port connection (QL150) and tap power connection (QL200) are optionally available.

## HIGHLIGHTS

- Plug-In connection
- QL500: Serial-to-Ethernet TCP/IP, Ethernet IP, Modbus conversion with RJ45 connector
- QLM500: IP65, rugged metal, all M12 connectors, double Ethernet port (avoid external switches), Ethernet TCP/IP, Ethernet IP protocol
- QLM600: IP65, rugged metal, all M12 connectors, PROFIBUS double port
- QLM700: IP65, rugged metal, all M12 connectors, double PROFINET port (avoiding external switches)
- Back-up and Restore function (QLM500/600/700 and QL500)
- Quick set-up of ID-NET™ networks with different layouts in modular way, reducing installation time and cost (by cables and T-connectors)

## MODELS AND ACCESSORIES

MODELS		QUICK LINK CONNECTION MODULES
Order No.		Description
93ACC1860		QL100 ID-NET T-CONNECTION
93ACC1868		QL150 ID-NET + SERVICE T-CONNECTION
93ACC1861		QL200 ID-NET + POWER T-CONNECTION
93ACC1862		QL300 STANDARD CONNECTION MODULE
93ACC1864		QL500 CONNECTION MODULE + ETHERNET
93ACC0033		QLM600 PROFIBUS IP65 CONN. MODULE
93ACC0037		QLM500 ETHERNET/IP IP65 CONN. MODULE
93ACC0038		QLM700 PROFINET IP65 CONN. MODULE
MODELS		ID-NET AND T-CONNECTOR
Order No.		Description
93ACC1860		QL100 ID-NET T-CONNECTION
93ACC1868		QL150 ID-NET + SERVICE T-CONNECTION
93ACC1861		QL200 ID-NET + POWER T-CONNECTION
ACCESSORIES		QUICK LINK ACCESSORIES
Service Cables		
Order No.		Description
93A051385		CAB-AUX03 M12 3P TO DB9 SERIAL CABLE 3M (for QL150)
93A051381		CAB-PW-EXT M12 POWER EXTENSION CABLE
93ACC1883		FMC300 M12 3P M. CONN. SERVICE (for QL150)
93ACC1884		FMC400 M12 3P F. CONN. POWER
93A051386		CAB-AUX04 15P DSUB TO DB9 SERIAL CABLE
970101063		CBL-1487 CONNECTOR THIN M12/5P/FEMALE
93ACC0040		FMC600 M12 8P M. A-Code QLM-I/O
ID-NET CABLES		
Order No.		Description
970101021		CBL-1480-01 THIN M12/5P MALE/FEMALE 1M
970101022		CBL-1480-02 THIN M12/5P MALE/FEMALE 2M
970101069		CBL-1490 TERM. RESIST. THIN M12/5P/MALE
970101082		CBL-1496 TERM. RESIST. THIN M12/5P/FEM.

## QL SERIES TECHNICAL FEATURES

### QL100, QL150, QL200

#### ELECTRICAL FEATURES

Power Supply 10 to 30 VDC  
Limited QL + Reader Current consumption 4 A Max.

#### ENVIRONMENTAL FEATURES

Protection Class IP65\*  
Operating Temperature 0° to 50 °C (+32° to 122 °F)  
Storage Temperature -20° to 70 °C (-4° to 158 °F)  
Humidity Max. 90% non condensing

\*When IP protection caps or IP cables and reading device are correctly connected.

### QL300, QL500, QLM500, QLM600, QLM700

#### ELECTRICAL FEATURES

Power Supply 10 to 30 VDC  
Limited QL + Reader Current consumption 4 A Max.

#### ENVIRONMENTAL FEATURES

Protection Class IP65\*  
Operating Temperature 0° to 50 °C (+32° to 122 °F)  
Storage Temperature -20° to 70 °C (-4° to 158 °F)  
Humidity Max. 90% non condensing

#### PHYSICAL FEATURES


##### QL300/500

Mechanical Dimensions 129 x 76 x 27 mm (5.1 x 3 x 1.1 in.)  
Weight QL300=312 g. (11 oz.); QL500=309 (10.9 oz.)

##### QLM500/600/700

Mechanical Dimensions 200 x 81 x 40 mm (7.9 x 3.2 x 1.6in.)  
Weight QLM=500 g. (18 oz.)

\*When IP protection caps or IP cables and reading device are correctly connected.

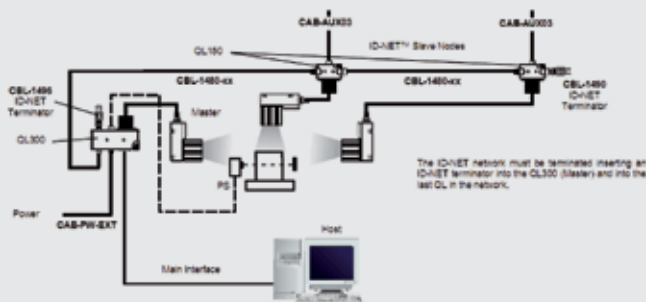

ID-NET™ Synchronized Network - QL300 = Matrix 410™ Master with QL | 150 = Matrix 410™ Slaves